

BTE Power PLUS

FEATURES


- WDRC Setting
- Seamless Design
- Low Level Expansion
- Feedback Management
- 4 Level Noise Reduction
- Low Battery Warning
- Low Power Consumption
- AGC-O Output Compression Limit



SPECIFICATIONS

Channels	16 Channels
Modes	2 Modes
Maximum Output(OSPL90)	135dB±3dB
High-Frequency Average	130
Maximum Full-On Gain	67±3dB
The Full-On Gain Value(HFA FOG@50)	65
Total Harmonic Distortion Value(THD)	≤3%
Equivalent Input Noise	≤25dB
Frequency Response Bandwidth	F1≤200 F2≥5000Hz
Volume Control	Switch
Battery Size	13p
Battery Current (mA)	1.3

FITTING RANGE

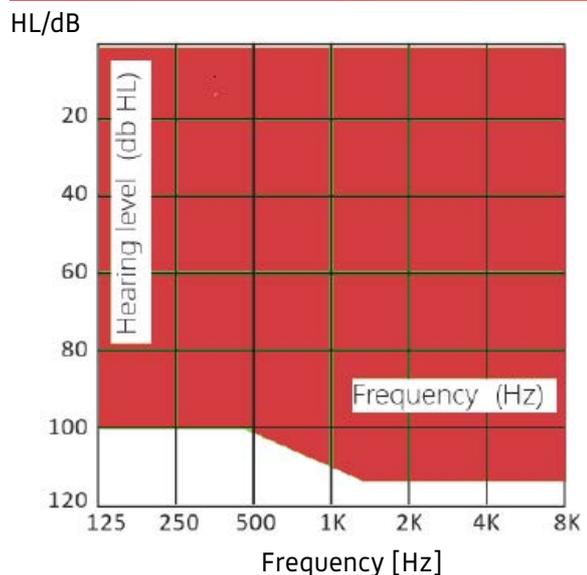

COLOR OPTIONS

