

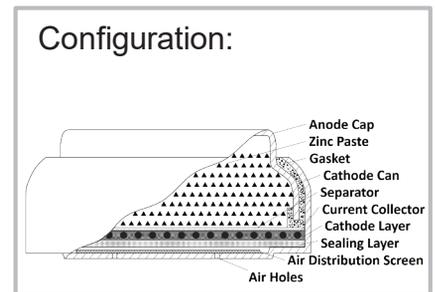


<b>Name</b>	13Mercury Free
<b>Cell Chemistry</b>	Zinc Air
<b>Recommended Use</b>	Hearing Aid Instruments
<b>Nominal Volatge</b>	1.45 V
<b>Typical Weight</b>	0.8g
<b>Typical Volume</b>	0.25cm <sup>3</sup>
<b>Environmental</b>	These cells have no added mercury.
<b>Operating Temp</b>	0°C to 50°C
<b>Standard Capacity (IEC 60086-2:2015):</b>	310mAh IEC Hearing aid standard test to 1,05 V at 20°C / 55% r.h. according to IEC 60086-2:2015/DIN EN 60086-2:2016
<b>Storage Loss at 70°F (21°C)</b>	Less than 5% in one year with tab applied.
<b>Shelf Life</b>	3 years (Room Temperature Preservation)
<b>Activation and use</b>	Remove and discard the plastic tab covering air holes. Allow the battery to stand for one minute to insure proper activation. The battery compartment must allow for an adequate oxygen supply to reach air holes.

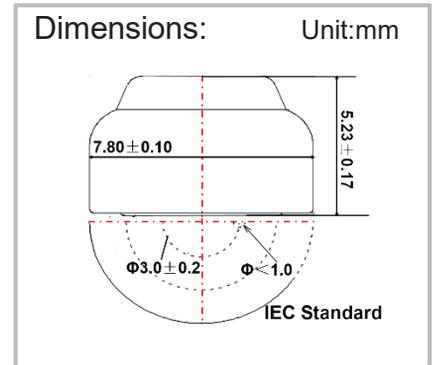

Typical IEC Discharge Performance

IEC 60086-2:2015 Standard

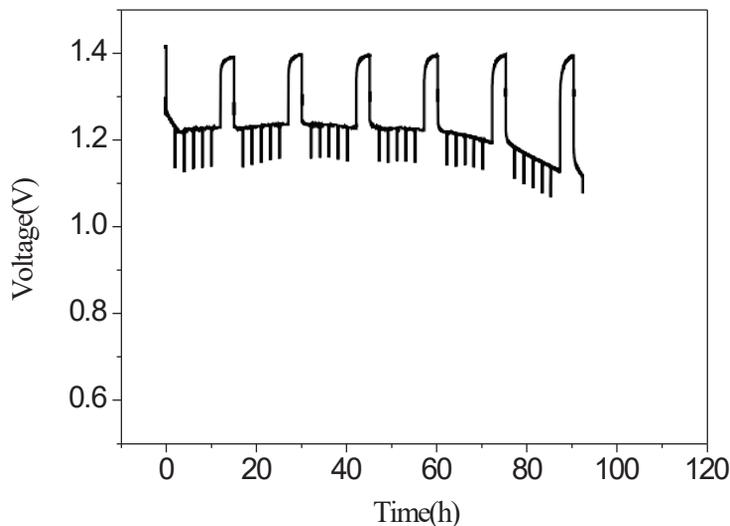

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.

**WeHear Innovations Pvt. Ltd.**

A5, Ground Floor, THE FIRST, near ITC Narmada, Vastrapur, Ahmedabad, Gujarat 380015

www.hearnu.com | +91 90330 47732 | ccare@hearnu.com